

# WiFi VoIP Phone Manual

## I. System request :

1. Need an Assess Point (AP)
  - AP SSID, for example: FON
  - WEP password, such as HEX 64bit: 1234567890
  - Enable DHCP function
2. Persons who need to apply for a number from the VoIP ISP, the following CCNET is the example:
  - VoIP Server IP Address, for example: 210.202.244.130
  - VoIP Server Port, for example: 7890 or 5060
  - VoIP user's name, for example: 10010072
3. The VoIP ISP Hyperlink:
  - VoipStunt <http://www.voipstunt.com/en/index.html>
  - CCNET <http://voip.ccnet.com.tw/sip/>
  - IpBB <http://www.ipbbnet.com/ipbb/index.aspx>
  - GoGoTalk <http://www.gogotalk.net.tw/>

## II. Wi-Fi Settings:




Pass menu




Select Phone Settings logo then pass OK



Select WLAN Settings then pass OK

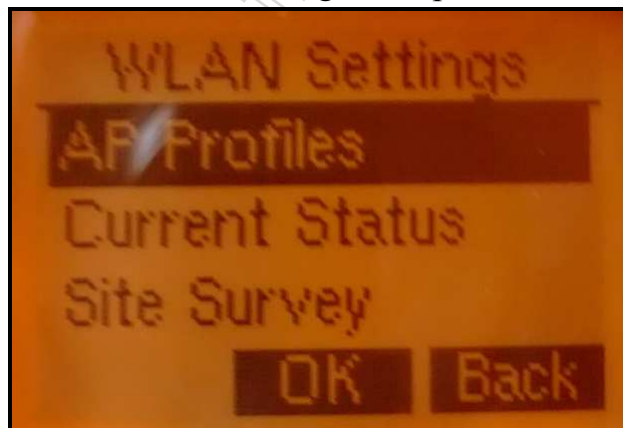

Select Site Survey then pass OK

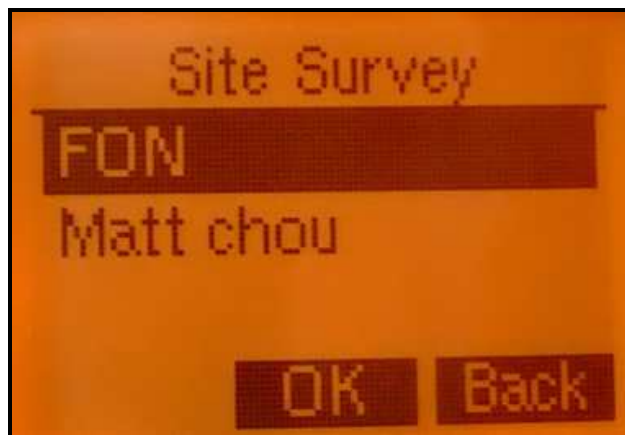

Select FON then pass OK




Pass Join



Select WEP then pass OK



Pass OK

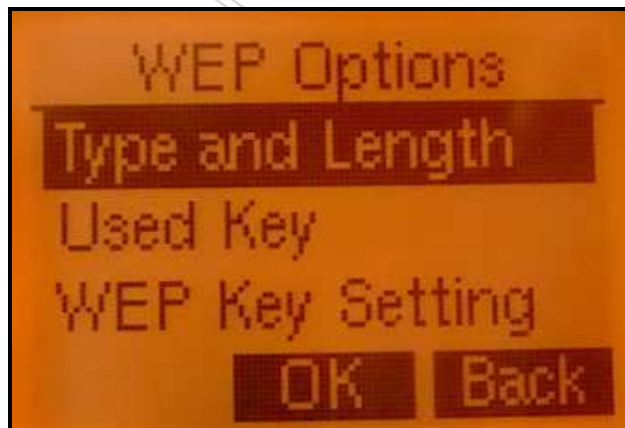

Select "Type and Length" then pass OK



Select HEX 64 Bit then pass OK




Select "Used Key" then pass OK



Select "Key#1" then pass OK



Select "WEP Key Setting" then pass OK

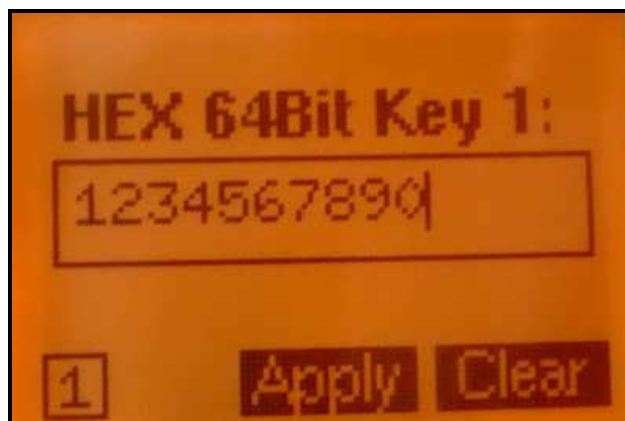

Input your password then pass Apply



Pass Back



Pass Join



Save the ap profile

Pass OK



# WiFi TX Rate Setting




Pass menu




Select Phone Settings logo then pass OK




Select WLAN Settings then pass OK

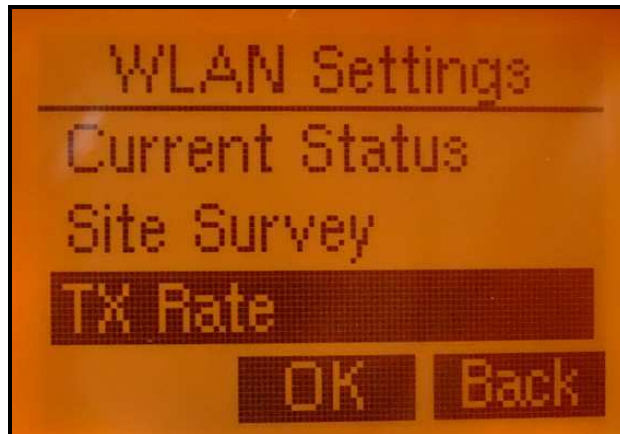

Select "TX Rate" then pass OK

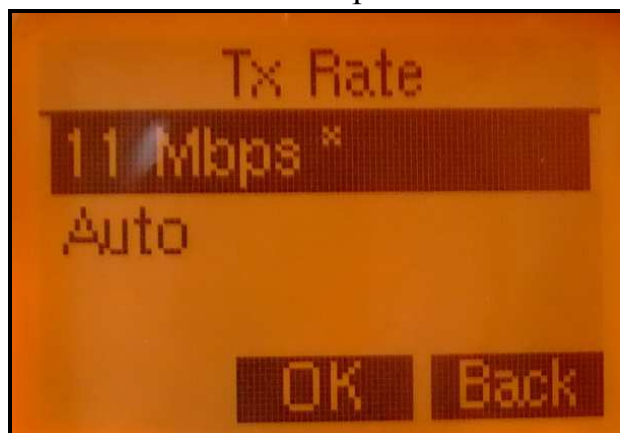

Select "Auto" then pass OK

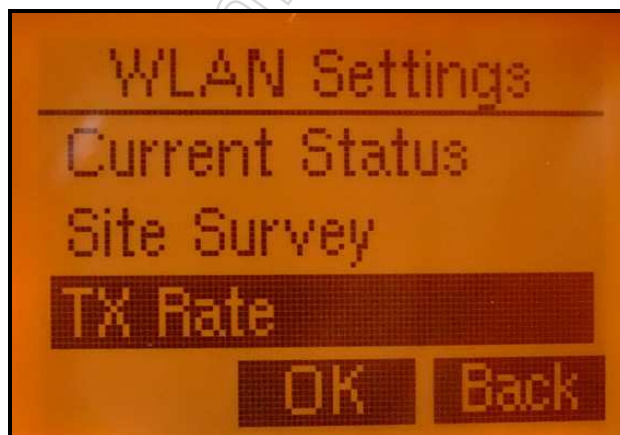

Pass Back



Pass Back



Pass Back



Return to Standby

### III. SIP Settings :



Pass Menu



Select "SIP Settings" then pass OK



Select "SIP Profile 1" then Pass OK




Select "Profile Name" then pass OK



Pass Apply



Select "Display Name" then pass OK

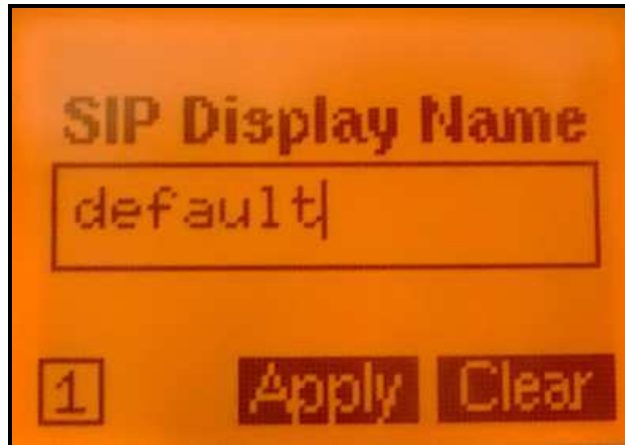

SIP Display Name

default

1 Apply Clear

This screenshot shows a configuration screen for SIP Display Name. The title is "SIP Display Name". Below the title is a text input field containing the word "default". At the bottom left, there is a small square icon with the number "1". At the bottom right, there are two buttons: "Apply" and "Clear".

Pass Apply



SIP Profile 1

Profile Name


Display Name

User Name

OK Back

This screenshot shows a menu for "SIP Profile 1". The title is "SIP Profile 1". Below the title is a horizontal line. Under the line, there are four menu items: "Profile Name", "Display Name", "User Name", and "User Name". At the bottom right, there are two buttons: "OK" and "Back".

Select "User Name" then pass OK

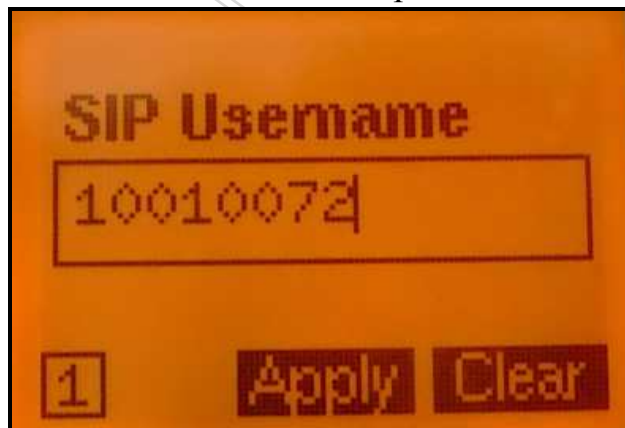

SIP Username

10010072


1 Apply Clear

This screenshot shows a configuration screen for SIP Username. The title is "SIP Username". Below the title is a text input field containing the number "10010072". At the bottom left, there is a small square icon with the number "1". At the bottom right, there are two buttons: "Apply" and "Clear".

Input Username then pass Apply



Select Register then pass OK

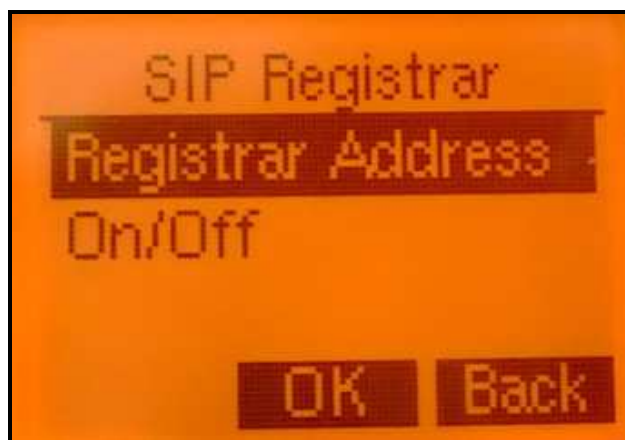


Select "Register Address" then pass OK





Input Address and Port then pass Apply

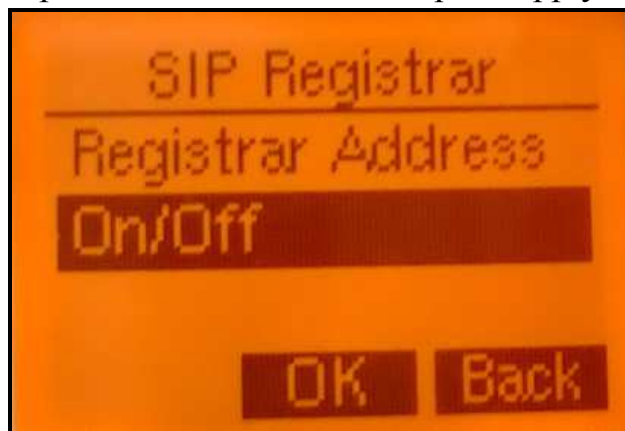

Select "On/Off" then pass OK




Select "On" then pass OK



Pass Back



Select "SIP Domain" then pass OK

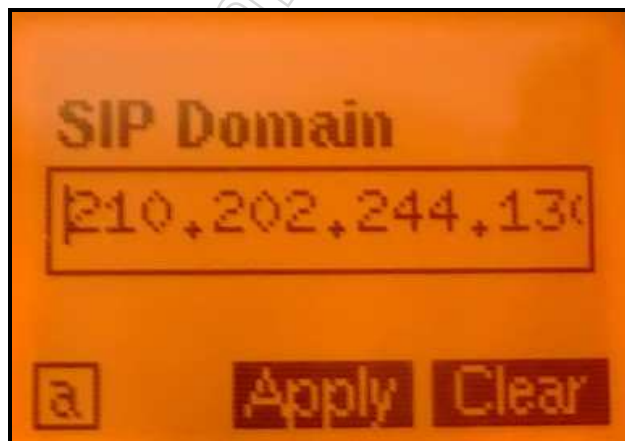


Input address(the same Server IP) then pass Apply



Select "SIP Password" then pass OK




Select "Auth User" then pass OK

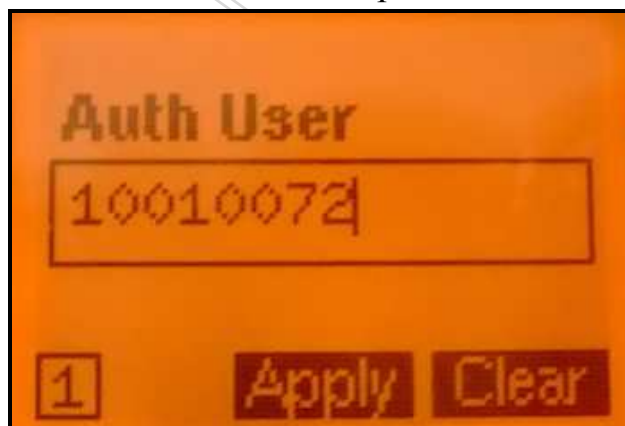

Input name then pass Apply



Select "Password" then pass OK

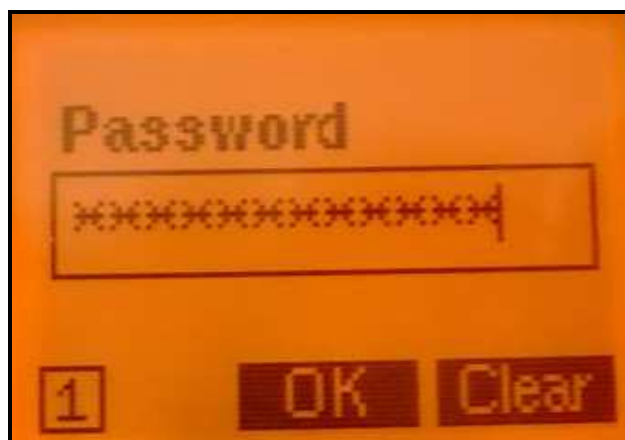

Input password then pass OK



Pass Back



Select "STUN Settings" then pass OK



Select "On/Off" then pass OK




Select "Off" then pass OK




Pass Back



Select "Outbound Proxy" then pass Ok

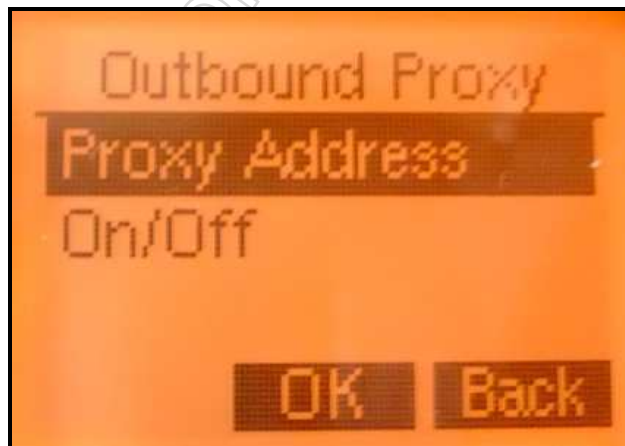

Select "On/Off" then pass OK

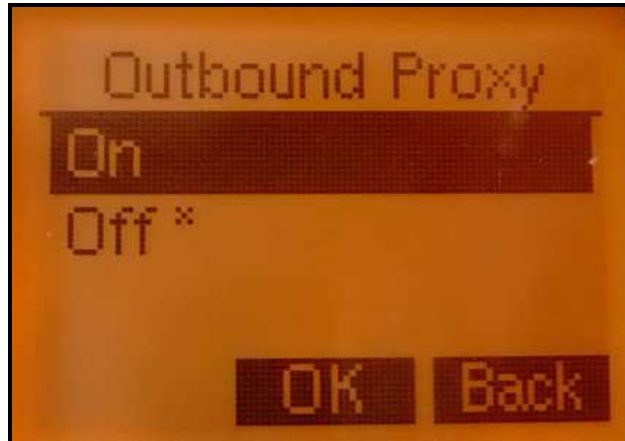

Select "Off" then pass OK



Pass Back



Pass Back



Pass Apply



Phone will power off  
Power on





Register to Server

confidential

#### IV. Time & Date Settings :



Pass "Quick"



Select "Date Time Set" then pass OK




Select "Time Set" then pass OK



Input 24hour format time then pass  
Apply



Select "Date Set" then pass OK

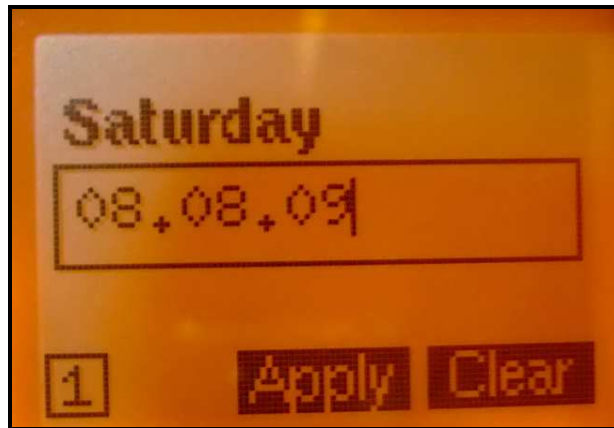

Input yy.mm.dd than pass Apply



Pass Back